

INDI ARC

L80 B10 > 54 000h | SDCM 3 | LLMF 84% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
INDI ARC 15	11W	1320 Lm	120 lm/W	1/4 Ø 1200 x 57 x 75 mm	IARC15
INDI ARC 25	20W	2400 Lm	120 lm/W	1/4 Ø 1200 x 57 x 75 mm	IARC25

*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

MATERIALS

CASING - electrostatically painted aluminium; standard colour - grey

DIFFUSER - OPQ-Opal/Polycarbonate


INSTALLATION

Suspended

FIXINGS

	INFO	CODE
End Cap	Single/Metal*	INDI-ENDCAP
	Single/PC	INDI-ENDCAP-S
Joint	Inline	INDI-JOINT-I
Suspension Kit	Simple INOX	ZLISS-INOX
	Electrical*	ZLISS-SUSP

*Any RAL colour option available. Order example: **INDI-ENDCAP-GR**

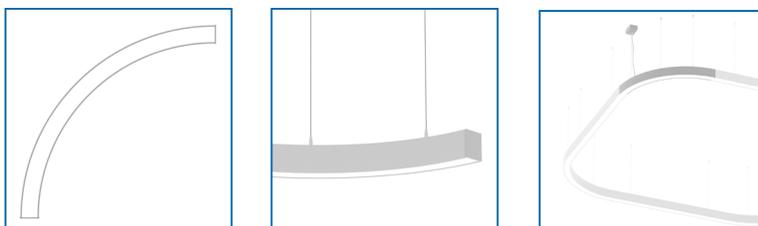

ORDER CODE

COLOUR TEMPERATURE

3000K	3K
4000K	4K

DRIVERTYPE

Standard	ST
Dimming - DALI	DL

DIFFUSER

Opal	OPQ
Micro-prismatic*	HEX

CASING COLOUR

Grey	GR
White	WH
Black	BL
Custom	RAL

CRI

≥ 90	C90
------	-----

THROUGH WIRING*

5-phase through wiring	TW5
------------------------	-----

*Available on request

Order code example: **IARC25-4K-ST-OPQ-GR**