

ARGO X

L80 B10 > 64 000h | SDCM 3 | LLMF 85% | CRI 80+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	DIFFUSER	PRODUCT SIZE	ORDER REFERENCE
ARGO X 40	43W	4245 Lm	99 lm/W	375 Lm	Ø 440 x 80 mm	ARGX40
ARGO X 45	43W	4525 Lm	105 lm/W	375 Lm	Ø 520 x 80 mm	ARGX45
ARGO X 50	47W	5165 Lm	110 lm/W	375 Lm	Ø 630 x 126 mm	ARGX50
ARGO X 70	70W	7160 Lm	102 lm/W	375 Lm	Ø 800 x 126 mm	ARGX70

*Values are given for colour temperature of 4000K and may vary for other options

MATERIALS


CASING - powder painted aluminium; standard colour - grey

BASE - steel sheet

DIFFUSER - OPQ-Opal/Polycarbonate

INSTALLATION

Surface mounted

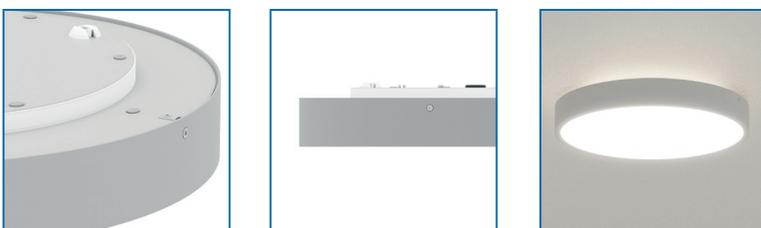

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL

CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

Order code example: **ARGX40-4K-ST-WH**