

MOON

L80 B10 > 54 000h | SDCM 3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
MOON C 30	37W	4430 Lm	120 lm/W	595 x 595 x 74 mm	MOOC30
MOON L 30	37W	4430 Lm	120 lm/W	Ø 475 x 76 mm	MOOL30

*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

MATERIALS

CASING - electrostatically painted aluminum; standard colour - white

DIFFUSER - OPQ-Opal/PMMA

INSTALLATION

Suspended ceilings with exposed grid 600x600

G/K ceilings (gypsum plasterboard)

ORDER CODE

COLOUR TEMPERATURE

3000K	3K
4000K	4K

DRIVER TYPE

Standard	ST
Dimming - DALI	DL

CASING COLOUR

White	WH
Grey	GR
Black	BL
Custom	RAL


EMERGENCY MODULE*

3 hr	EM
------	----

CRI

≥ 90	C90
------	-----

*Only available in MOOC30 on request

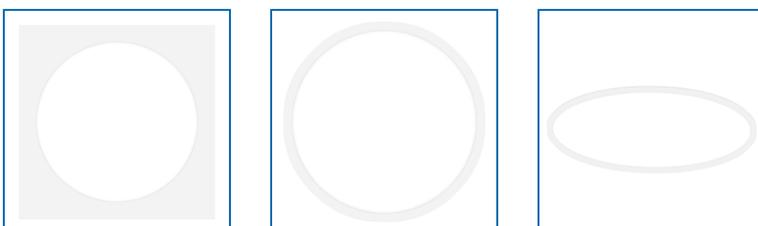

Order code example: **MOOC30-4K-ST-WH-EM**