

## COFFEX ARC

L80 B10 > 54 000h | SDCM 3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	COLOUR TEMPERATURE	ORDER REFERENCE
COFFEX ARC 15	14W	1220 Lm	87 lm/W	355 x 134 x 48 mm	3000K	CARC15
COFFEX ARC 15	14W	1260 Lm	90 lm/W	355 x 134 x 48 mm	4000K	CARC15

\*Values are given for CRI 80 and may vary for other options


### MATERIALS

CASING - powder painted steel sheet; standard colour - white

DIFFUSER - OPQ-Opal/Polycarbonate

### INSTALLATION

Into modular ceilings 600x600 with a visible supporting structure

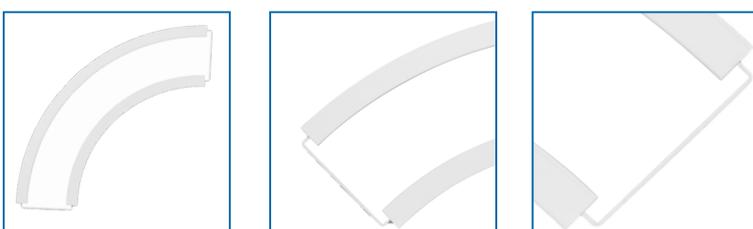

### ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVERTYPE	
Standard	ST
Dimming - DALI	DL
CASING COLOUR	
White	WH
Grey	GR
Black	BL
Custom	RAL
CRI	
≥ 90	C90

Order code example: **CARC15-4K-ST-WH**