

GEO SQ

L80 B10 > 52 000h | SDCM 3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
GEO SQ S 70	60W	6770 Lm	113 lm/W	680 x 680 x 60 mm	GES570
GEO SQ L 85	90W	8650 Lm	96 lm/W	980 x 980 x 80 mm	GESL85

*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

MATERIALS

CASING - powder painted aluminium; standard colour - grey


DIFFUSER - OPQ-Opal/Polycarbonate

INSTALLATION

Suspended

ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVER TYPE	
Standard	ST
Dimming - DALI	DL
CASING COLOUR	
Grey	GR
White	WH
Black	BL
Custom	RAL
CRI	
≥ 90	C90

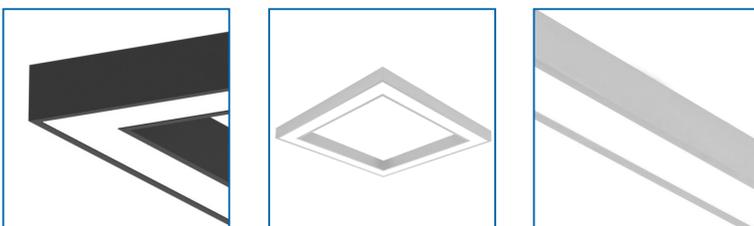

Order code example: **GES570-4K-ST-GR**