

GEO ARC

L80 B10 > 54 000h | SDCM 3 | LLMF 84% | CRI 80-90+

| PRODUCT NAME | POWER CONSUMPTION | LUMEN OUTPUT* | EFFICACY* | PRODUCT SIZE | INFO | ORDER REFERENCE |
|---------------|-------------------|---------------|-----------|----------------------|---------------|-----------------|
| GEO ARC S 45 | 45W | 4490 Lm | 100 lm/W | Ø 800 x 100 x 62 mm | 1/2-Ring-180° | GARS45 |
| GEO ARC L 70 | 70W | 7270 Lm | 104 lm/W | Ø 1200 x 100 x 62 mm | 1/2-Ring-180° | GARL70 |
| GEO ARC XL 30 | 30W | 2990 Lm | 100 lm/W | Ø 2000 x 100 x 62 mm | 1/8-Ring-45° | GAXL30 |
| GEO ARC XL 40 | 40W | 4060 Lm | 102 lm/W | Ø 2000 x 100 x 62 mm | 1/6-Ring-60° | GAXL40 |
| GEO ARC XL 60 | 60W | 6200 Lm | 103 lm/W | Ø 2000 x 100 x 62 mm | 1/4-Ring-90° | GAXL60 |

*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

MATERIALS

CASING - powder painted aluminum profile; standard colour - grey

DIFFUSER - OPQ-Opal/Polycarbonate


INSTALLATION

Suspended

FIXINGS

| | INFO | CODE |
|----------------|---------------|-------------|
| End Cap | Single/Metal* | GEO-ENDCAP |
| Joint | Inline | GEO-JOINT-I |
| Suspension Kit | Simple INOX | ZLISS-INOX |
| | Electrical* | ZLISS-SUSP |

*Any RAL colour option available. Order example: **GEO-ENDCAP-GR**

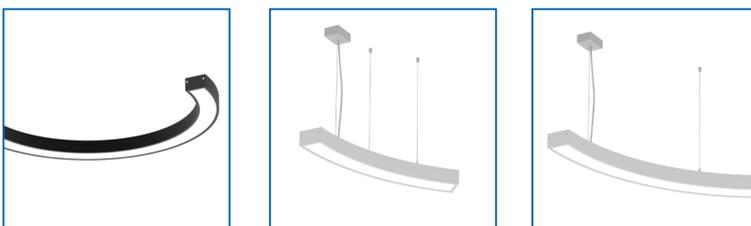

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVERTYPE

Standard ST

Dimming - DALI DL

CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

CRI

≥ 90 C90

THROUGH WIRING*

5-phase through wiring TW5

*Available on request

Order code example: **GARS45-4K-ST-BL**