

SOLIS SQ

L80 B10 > 54 000h | SDCM 3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
SOLIS SQ 45 (600 x 600)	38W	4370 Lm	115 lm/W	595 x 595 x 72 mm	SOSQ45
SOLIS SQ SM 45 (Surface Mounted)	38W	4370 Lm	115 lm/W	595 x 595 x 75 mm	SQSM45

*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

MATERIALS

CASING - electrostatically painted aluminium; standard colour - white


DIFFUSER - OPQ-Opal/PMMA

INSTALLATION

Surface mounted

Recessed into the modular ceiling

Recessed into plaster-cardboard

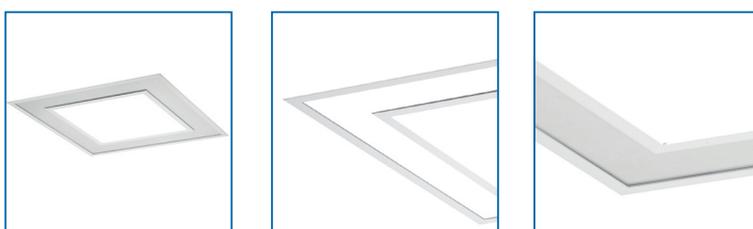

ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVER TYPE	
Standard	ST
Dimming - DALI	DL
CASING COLOUR	
White	WH
Grey	GR
Black	BL
Custom	RAL
EMERGENCY MODULE*	
3 hr	EM
CRI	
≥ 90	C90

*Only available in SOSQ45 on request

Order code example: **SOSQ45-4K-DL-WH**