

INCOR

L80 B10 > 54 000h | SDCM 3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
INCOR 30	24W	2900 Lm	121 lm/W	875 x 101 x 64 mm	INCO30
INCOR 40	31W	3860 Lm	125 lm/W	1165 x 101 x 64 mm	INCO40
INCOR 50	38W	4830 Lm	127 lm/W	1455 x 101 x 64 mm	INCO50
INCOR 55	44W	5790 Lm	132 lm/W	1745 x 101 x 64 mm	INCO55

*Values are given for colour temperature of 4000K, HEX diffuser, CRI 80 and may variate for other options

MATERIALS

CASING - electrostatically painted aluminium; standard colour - grey
 DIFFUSER - OPQ-Opal/Polycarbonate, HEX-Micro-prismatic/PMMA

INSTALLATION

Wall mounted
 Suspended

FIXINGS


	INFO	CODE
End Cap	Single *	INCO-ENDCAP
Joint	Inline	INCO-JOINT-I
Suspension Kit	Simple INOX	ZLISS-INOX
	Electrical*	ZLISS-SUSP

*Any RAL colour option available.
 Order example: **INCO-ENDCAP-GR**

ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVER TYPE	
Standard	ST
Dimming - DALI	DL
DIFFUSER	
Micro-prismatic	HEX
Opal	OPQ

CASING COLOUR	
Grey	GR
White	WH
Black	BL
Custom	RAL
EMERGENCY MODULE*	
3 hr	EM
ADD-ONS	
Motion Sensor	MS
CRI	
≥ 90	C90
THROUGH WIRING**	
5-phase through wiring	TW5

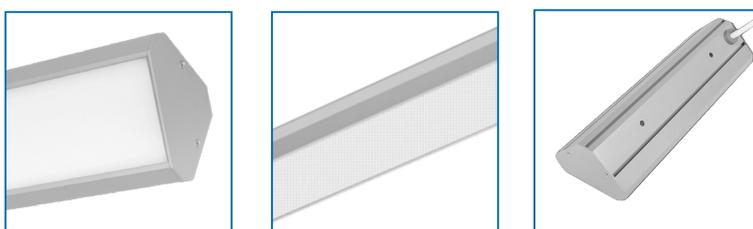

*Remote EM only on INCO30
 **Available on request

Order code example: **INCO40-4K-ST-HEX-GR-EM**