

INDI TRIMLESS

L80 B10 > 72 000h | SDCM 3 | LLMF 85% | CRI 84

| PRODUCT NAME | POWER CONSUMPTION | LUMEN OUTPUT* | EFFICACY* | PRODUCT SIZE | ORDER REFERENCE |
|------------------|-------------------|---------------|-----------|-------------------|-----------------|
| INDI TRIMLESS 15 | 13W | 1300 Lm | 100 lm/W | 545 x 57 x 76 mm | INTR15 |
| INDI TRIMLESS 30 | 25W | 2710 Lm | 108 lm/W | 1085 x 57 x 76 mm | INTR30 |
| INDI TRIMLESS 40 | 36W | 4120 Lm | 114 lm/W | 1625 x 57 x 76 mm | INTR40 |
| INDI TRIMLESS 55 | 48W | 5500 Lm | 115 lm/W | 2170 x 57 x 76 mm | INTR55 |

*Values are given for colour temperature of 4000K and may vary for other options

MATERIALS


CASING - electrostatically painted aluminium; standard colour - grey

DIFFUSER - PMMA opal

FIXINGS

| | INFO | CODE |
|----------------|---------------|--------------|
| End Cap | Single/Metal* | INTR-ENDCAP |
| Joint | Linear | INTR-JOINT-L |
| Suspension Kit | Simple INOX | ZLISS-INOX |
| | Electrical* | ZLISS-SUSP |
| Through wiring | 545 mm | INTR15-WIRE |
| | 1085 mm | INTR30-WIRE |
| | 1625 mm | INTR40-WIRE |
| | 2170 mm | INTR55-WIRE |

*Any RAL colour option available. Order example: **INTR-ENDCAP-GR**

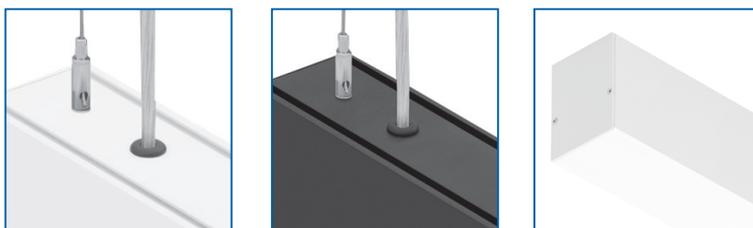

INSTALLATION

Surface mounted

Suspended

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL

CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

EMERGENCY MODULE *

3 hr EM

*Only available in INTR40 and INTR55 on request

Order code example: **INTR15-4K-ST-GR**