



SOPRANO X

L80 B10 > 72 000h | SDCM 3 | LLMF 85% | CRI 84

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
SOPRANO X 40	37W	4180 Lm	113 lm/W	1085 x 28 x 100 mm	SOPX40
SOPRANO X 70	59W	6910 Lm	117 lm/W	1625 x 28 x 100 mm	SOPX70
SOPRANO X 95	79W	9650 Lm	122 lm/W	2170 x 28 x 100 mm	SOPX95

*Values are given for colour temperature of 4000K / HEX diffuser, and may vary for other options

MATERIALS

CASING - powder painted aluminium; standard colour - grey

DIFFUSER - PC


FIXINGS

	INFO	CODE
End Cap	Single*	SOPR-ENDCAP
Suspension Kit	Simple INOX	ZLISS-INOX
	Electrical*	ZLISS-SUSP
Joints	Inline installation	SOPR-INSTA-I
	Tubular wrench 6x7mm	SOPR-INSTA-W

*Any RAL colour option available. Order example: **SOPR-ENDCAP-GR**

INSTALLATION

Suspended

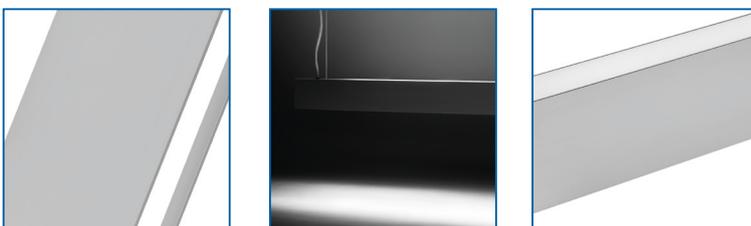

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL

DIFFUSER

Microprismatic HEX

Opal OPQ

Parabolic Louvers PAR

CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

Order code example: **SOPX40-4K-ST-HEX-GR**