

SOPRANO

L80 B10 > 72 000h | SDCM 3 | LLMF 85% | CRI 84

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
SOPRANO 15	14W	1440 Lm	103 lm/W	545 x 28 x 100 mm	SOPR15
SOPRANO 30	25W	2880 Lm	115 lm/W	1085 x 28 x 100 mm	SOPR30
SOPRANO 45	37W	4310 Lm	116 lm/W	1625 x 28 x 100 mm	SOPR45
SOPRANO 60	48W	5750 Lm	120 lm/W	2170 x 28 x 100 mm	SOPR60

*Values are given for colour temperature of 4000K / HEX diffuser, and may vary for other options

MATERIALS

CASING - powder painted aluminium; standard colour - grey

DIFFUSER - PC


FIXINGS

	INFO	CODE
End Cap	Single*	SOPR-ENDCAP
	Simple INOX	ZLISS-INOX
Suspension Kit	Electrical*	ZLISS-SUSP
	Inline installation	SOPR-INSTA-I
Joints	Tubular wrench 6x7mm	SOPR-INSTA-W

*Any RAL colour option available. Order example: **SOPR-ENDCAP-GR**

INSTALLATION

Suspended

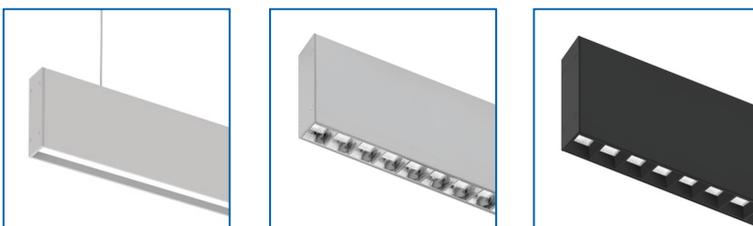

ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVER TYPE	
Standard	ST
Dimming - DALI	DL
DIFFUSER	
Microprismatic	HEX
Opal	OPQ
Parabolic Louvers	PAR
CASING COLOUR	
Grey	GR
White	WH
Black	BL
Custom	RAL

Order code example: **SOPR30-4K-ST-HEX-GR**