

INDI TRIMLESS C

L80 B10 > 72 000h | SDCM 3 | LLMF 85% | CRI 84

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT	EFFICACY	PRODUCT SIZE	COLOUR TEMPERATURE	ORDER REFERENCE
INDI TRIMLESS C 25	25W	2560 Lm	102 lm/W	587 x 57 x 76 mm	3000K	ITRC25
INDI TRIMLESS C 25	25W	2600 Lm	104 lm/W	587 x 57 x 76 mm	4000K	ITRC25

MATERIALS

CASING - electrostatically painted aluminium; standard colour - grey

DIFFUSER - PMMA opal

INSTALLATION


Surface mounted

Suspended

FIXINGS

	INFO	CODE
End Cap	Single/Metal*	INTR-ENDCAP
Joint	Linear	INTR-JOINT-L
Suspension Kit	Simple INOX	ZLISS-INOX
	Electrical*	ZLISS-SUSP
Through wiring		INTR30-WIRE

*Any RAL colour option available. Order example: **INTR-ENDCAP-GR**

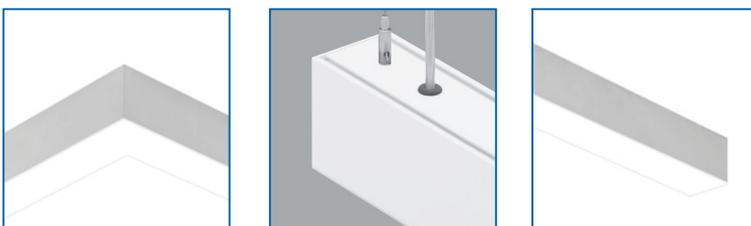

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL

CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

Order code example: **ITRC25-4K-ST-GR**